


MODEL	VCM - INSIDE CURB ROUGH OPENING	GLASS	BRONZE ACRYLIC DOME	FROSTED OR WHITE DOME	FLATLITE	FLAT TOP PYRAMID
2028	14.5 X 22.5	•	•	•	•	•
2036	14.5 X 30.5	•	•	•	•	•
2040	14.5 X 34.5	•	•	•	•	•
2052	14.5 X 46.5	•	•	•	•	•
2428	18.5 X 22.5	•	•	•	•	•
2828	22.5 X 22.5	•	•	•	•	•
2836	22.5 X 30.5	•	•	•	•	N/A
2840	22.5 X 34.5	•	•	•	•	•
2852	22.5 X 46.5	•	•	•	•	•
2864	22.5 X 58.5	•	•	•	•	•
2868	22.5 X 62.5	•	•	•	•	•
2876	22.5 X 70.5	•	•	•	•	•
28100	22.5 X 94.5	•	•	•	•	•
3636	30.5 X 30.5	•	•	•	•	N/A

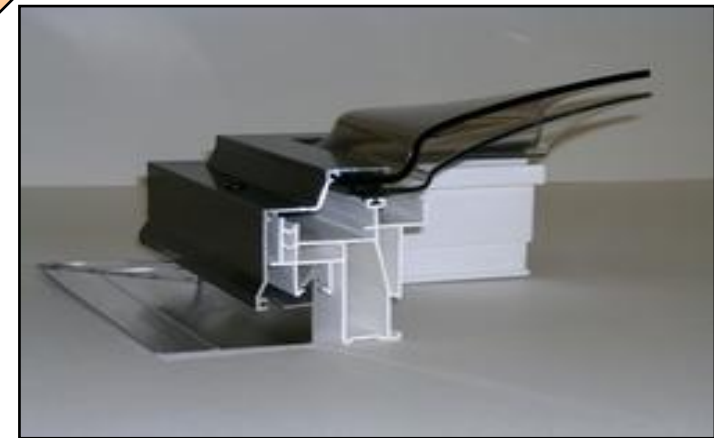

Cross Section of MSF acrylic dome

Skylights shall be thermally broken self flashing Dayliter MSF Skylight as manufactured by Dayliter Skylights in Langley, BC, Canada.


The skylight base frame shall be a triple hollow (frost free) rigid vinyl extrusion with all corners fusion welded to ensure a watertight frame. The vinyl base frame shall include a minimum 3 inch aluminum roof flange.

The factory assembled units shall include an aluminum retainer cap (T6063) in (brown) (black) (white) (clear anodized) finish. The skylight shall be fastened together with stainless steel screws penetrating the side of the skylight.


Glazing materials shall be double acrylic plastic (Dome) (Flat-lite) (Flat Top Pyramid) in (clear) (bronze) (white) with a uniform air space between the domes and a perimeter moisture flange (no-leak guarantee) stretch formed into the top (acrylic) layer to eliminate water penetration.

The condensation gutter with weep holes in all four corners shall be an integral part of the unit


Low Profile Dome

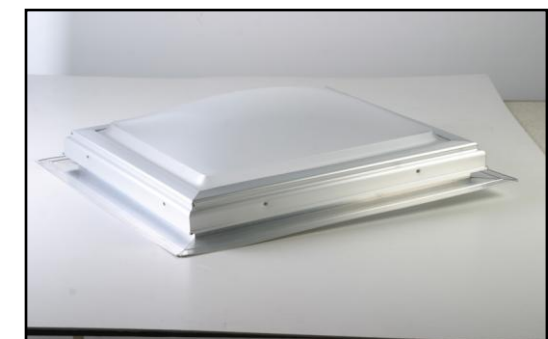

Flat Top Pyramid

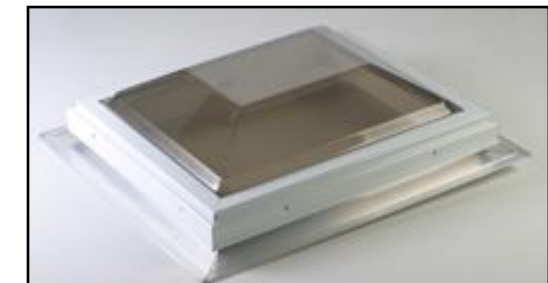

Flatlite

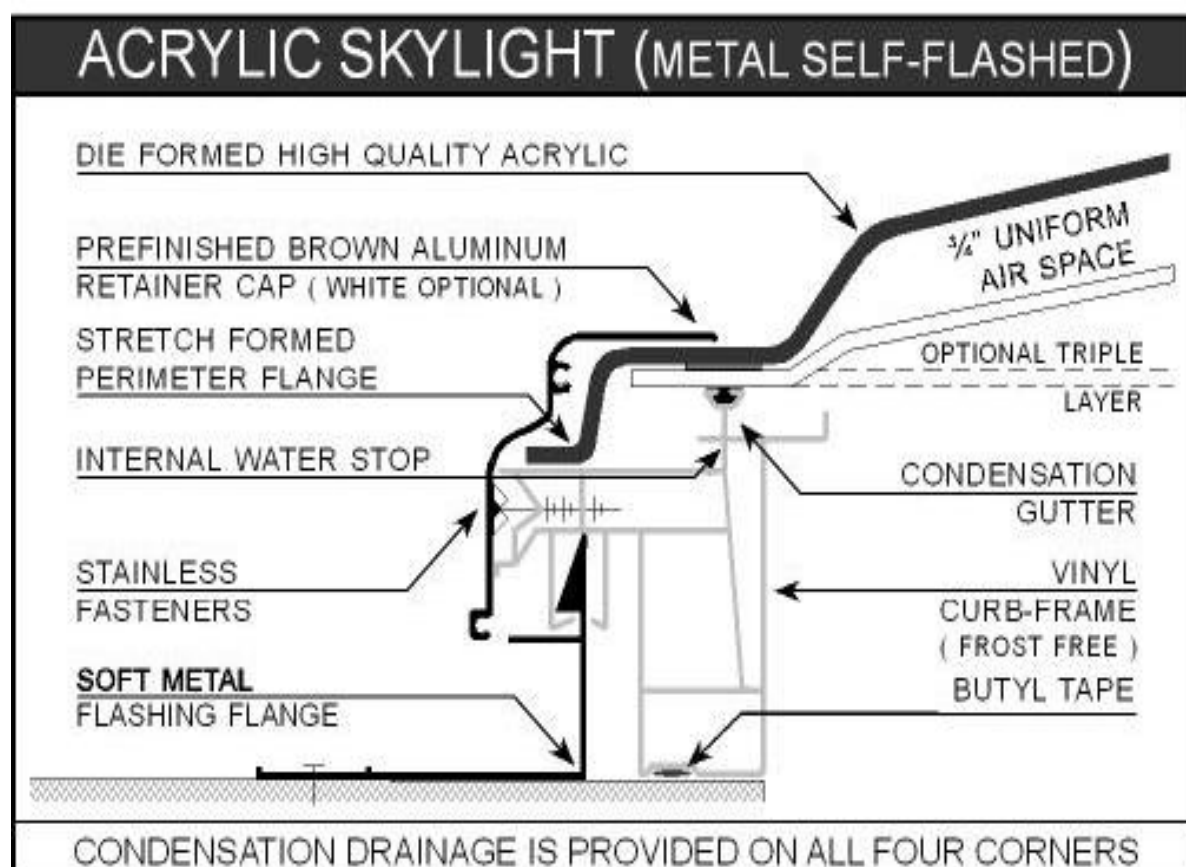

CARE AND MAINTENANCE

Dayliter skylights require minimal care and maintenance. Because skylights are exposed to outside elements, they may get dirty from time to time. Cleaning them is a snap! By following these simple instructions you can restore the splendour of the skylight.

CLEANING INSTRUCTIONS

- * Wash with mild detergent and lukewarm water using a soft cloth or ordinary soft bristle brush
- * To remove tar, grease, paint or similar products use a good grade of naphtha or kerosene.

DO NOT USE: Gritty or rough cloths, window cleaning fluids, scouring compounds, leaded or ethyl gasoline, solvents such as or similar to alcohol, acetone, carbon or tetrachloride.